


Thank you for purchasing a Screen Technics Projection Screen, please ensure that you read the following instructions fully before attempting to install this product.

WALL MOUNTING INSTRUCTIONS

STEP 1. Measure the wall where the screen is to be installed and mark with a pencil the desired height to top of screen case and also the centre of the screen.



STEP 2. Measure the length of screen canister along the top surface and mark the centre of the canister with a pencil, to assist in lining up the screen when mounting.

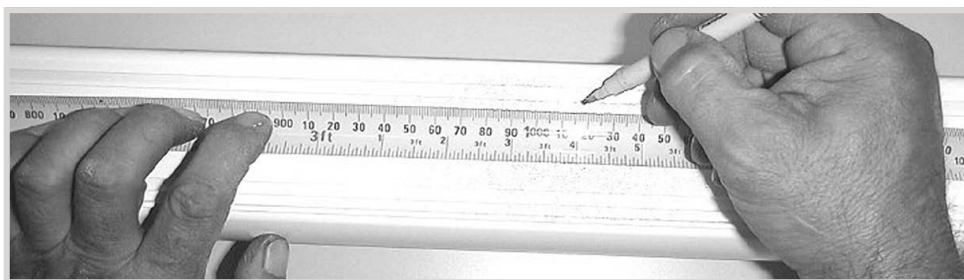

STEP 3. Determine the best positions for the wall brackets, allowing that in Gyprock or in low strength walls the brackets will be screwed into a timber stud. In more solid walls, such as masonry, position the brackets approx 150mm in from the canister end. The brackets should be no more than 450mm in from each end. You must use a minimum of 3 off wood screws per bracket or 2 off Dyna-bolts, for masonry walls and you must be satisfied that the attachment is strong enough for the a safe installation.



NB: Top of bracket equals top of screen canister.

Please note: The CinemaTech screen comes standard with 300mm top black leader above the image area to assist in mounting the canister high out of the way, to achieve the best possible lay-flat results (flat surface quality) you should utilise all of the leader.

It is possible to use less leader than supplied but poorer lay-flat will result from this decision.

STEP 4. You may need to remove the bottom clip in order to screw brackets to wall, please ensure to replace them afterwards.

STEP 5. Using two people install the screen by placing the screen canister into the bottom of the bracket clips and pivoting back the canister to slot the top pins into the T channels running along the top of the canister (you may have to remove any tape that is in the way).

Continued Over.../


STEP 6. Holding screen in position tighten up Allen screw at each end and check that the top pins have hooked into the T section of the screen canister.



STEP 7. Ensure projection screen case is latched into the bracket as shown.



STEP 8. Once the screen is installed remove the black tape from the bottom of the canister (this tape is to prevent screen damage during transport or installation) to free the screen for operation.

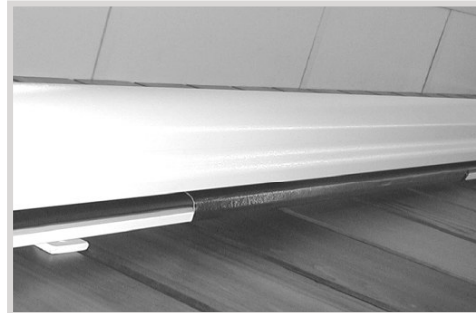



WARNING - PLEASE READ

STEP 9. Note: due to legislative changes the CinemaTech is now supplied with a wall cleat so that when the screen is not in use the chain can be tied off to prevent children from becoming entangled with the chain - the installation of this cleat is mandatory and should be positioned at least 1600mm above floor level.



CEILING MOUNT INSTRUCTIONS

Below is a photo showing a side view using the brackets for ceiling fixing, you would follow the instructions for the wall mounting system, with the only difference being the screen is mounted hard against the ceiling. It is important that adequate support is supplied by the ceiling structure to support the screen and to ensure a safe installation. Never rely just on the Gyprock for attachment.

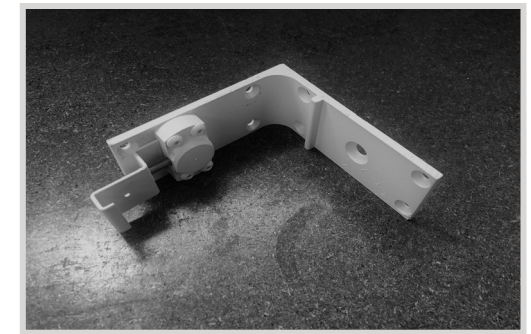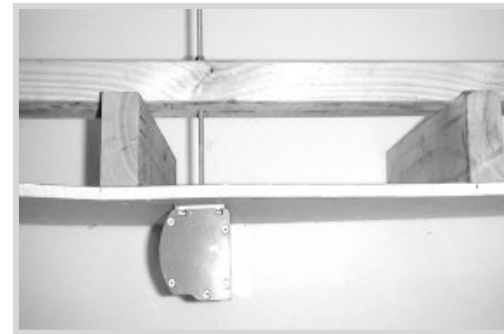

Please follow these instructions to ensure trouble free operation;

- Ensure that the screen is free to descend and that any adhesive tape that has been placed bottom of the screen (to stop movement during transport) has been fully removed.
- When installed, the opening in the canister should be down and at the back of the canister. This will put the chain drive on the left-hand side of the screen, as viewed by the audience. (Unless ordered otherwise).
- Cleaning of the screen is best achieved by first dusting the surface with a feather duster, then to remove any stubborn marks, use a small amount of mild detergent and warm water on a clean white lint free cloth. Do not use a saturated cloth, as this may leave a watermark, only a damp one. It is most important that you only treat the actual mark by this process and not the entire surface.

Should you have any questions regarding the installation of our projection screens please call our technical sales desk on +61 2 4869 2100 for assistance.