

Thank you for purchasing a Screen Technics Viewmaster Pro Screen Box, please ensure that you read the following instructions fully before attempting to install this product.

## GENERAL ADVICE

The Screen Box is an in-ceiling solution for the range of Screen Technics Viewmaster Pro Projection Screens and is to be mounted above the ceiling line, utilising the ceiling edge trim to cover the ceiling material cut-out.

It has power cable and input cable entry hole with cover located on the left hand side. Please allow sufficient cable length to allow wiring to be performed at a height suitable for the install environment.

Note: Access to control inputs cannot be connected easily with the screen fitted in the screen box.




## INSTALLATION ADVICE

The screen box is constructed in 18mm MDF board and as such can be used to fit any brackets you may care to utilise, by screwing straight into the box itself, being careful not to penetrate into the internal area, or use the supplied corner captive nutcerts and eye-bolts to support the screen by chain and turnbuckle from a suitable structure above.

It is recommended that at least 4 separate chains are used and that the structure you choose to mount from is secure enough for the job.

## SCREEN INSTALLATION

Please note the screen brackets come supplied with the Projection Screen, not the Screen Box, so you will carry out this procedure at the time of screen install.

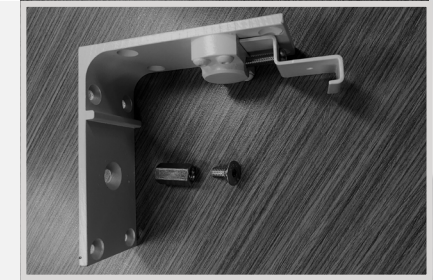

The screen box comes with 2 or 3 (depending on screen size) recessed cutouts for the L-shaped screen bracket to be installed, utilising the supplied Phillips type bolt and washer, which are screwed into the pre-fitted tee-nuts located in the roof of the screen box. We recommend that you also put at least 4 wood screws into the provided holes as a back-up measure against any bolt failure.

Should you have any questions regarding the installation of our projection screens please call our technical sales desk on +61 2 4869 2100 for assistance.